

Nexlok Clampless Air Hose



- Description** Premium Clampless Air & Water Hose
- Tube** Prime Black Nitrile PVC Blend
- Reinforcement** Multiple Polyester Spirals
- Cover** Prime Black Nitrile PVC Blend
- Temp. Range** -22 to +150F / -30C to +65C (see Cautionary Note below)
- Features**
- Compatible for use with standard industry lock on fittings without clamps or ferrules
 - Complies with RMA Class B Designation for medium to high oil resistance • Lighter than rubber hose in the same dimensions • Electrically Non-Conductive • Due to our manufacturing process, no release agents like silicone are present
 - Cover is non-marking and resistant to UV and ozone attack • Supplied in long one piece lengths
- Applications** Excellent air tool hose, air and water lines, mold machine water cooling, water soluble chemical spray, low temperature and other outdoor air applications.
- Cautionary Note** Nexlok is a thermoplastic hose and *should not* be used without clamps at elevated temperatures. Actual working conditions tests should be conducted to determine suitability.




Class 157 Premium Clampless Air and Water Hose

Part No.	I.D.	O.D.	Max. WP PSI at 68F/20C*	Standard Package	Wgt. Per 100 Feet		Package Weight		Stocked**
					Lbs	Kgs	Lbs	Kgs	
157-04008501	1/4	.500	200	500 ft/reel	8.4	3.8	42	19	yes
157-05008501	5/16	.562	200	500 ft/reel	9.8	4.4	49	22	no
157-06008501	3/8	.625	200	500 ft/reel	11.2	5.1	56	25	yes
157-08008501	1/2	.750	200	500 ft/reel	14.2	6.4	71	32	yes
157-10008501	5/8	.875	200	500 ft/reel	17.1	7.8	86	39	no
157-12008501	3/4	1.000	200	500 ft/reel	22.5	10.2	113	51	no

Nexaqua Reinforced Water Hose

- Description** Commercial Grade PVC Water Hose
- Tube** Black PVC
- Reinforcement** 2 Polyester Spirals
- Cover** Class 160 – Opaque Green, Class 161 – Transparent Green
- Temp. Range** +25 to +150F / -5 to +65C *
- Applications** Golf course, greenhouse hose, parks maintenance, contractors, industrial, irrigation
Coupled assemblies available.

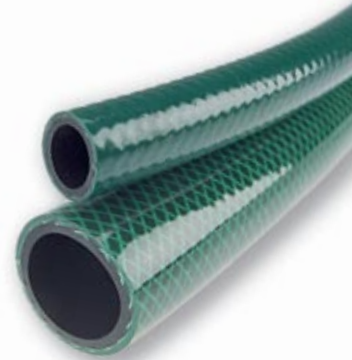

Class 160 Nexaqua GRN – Opaque Green Cover

Part No.	I.D.	O.D.	Max. WP PSI at 68F/20C*	Standard Package	Wgt. Per 100 Feet		Package Weight		Stocked**
					Lbs	Kgs	Lbs	Kgs	
160-08005300	1/2	.700	150	300 ft/coil	10.8	4.9	32	15	yes
160-10005300	5/8	.825	125	300 ft/coil	13.1	5.9	39	18	yes
160-12005300	3/4	1.000	100	300 ft/coil	19.6	8.9	59	27	no
160-16005200	1	1.300	100	200 ft/coil	30.9	14.0	62	28	no

Class 161 Nexaqua CLR – Transparent Green Cover

Part No.	I.D.	O.D.	Max. WP PSI at 68F/20C*	Standard Package	Wgt. Per 100 Feet		Package Weight		Stocked**
					Lbs	Kgs	Lbs	Kgs	
161-12005300	3/4	1.000	100	300 ft/coil	19.6	8.9	59	27	yes
161-16005200	1	1.300	100	200 ft/coil	30.9	14.0	62	28	yes

Notes

* Working pressures shown are at 68F/ 20C. Higher temperatures reduce the available working pressure. See temperature/pressure chart.

** Minimum quantity guideline applies for non-stock items. Other sizes, colors and lengths are available on request. Contact Nexgen Hose. Due to our process of continuous improvement, specifications are subject to change without notification.